




# PEAK OUTDOOR WALL

700WSPEAK

## General Product Information



## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

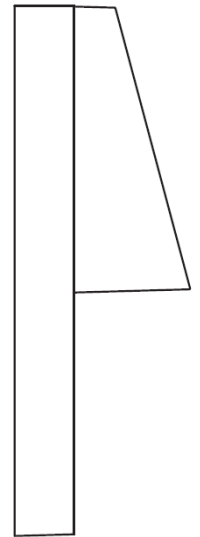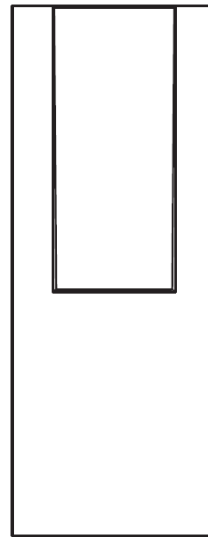

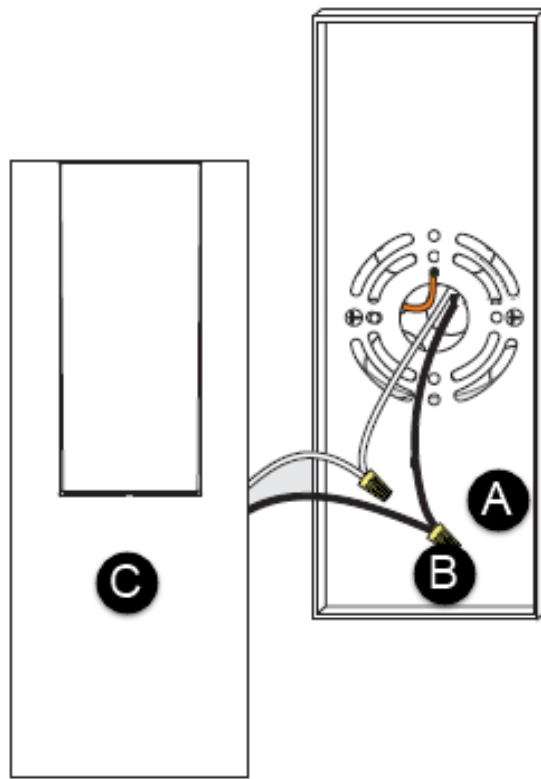

## FIXTURE PARTS

- A. Mounting Plate & #8-32 Screws (Not Illustrated)
- B. Wire Nut Connections
- C. Fixture Base & Fixture Screws (Not Illustrated)
- D. Electrical Box (Not Illustrated)

## INSTRUCTIONS

### I. Preparing the Fixture

1. Remove the two fixture screws on the top and bottom of the fixture.
2. Remove the mounting plate from the fixture base.
3. Attach the mounting plate to the electrical box using the two #8-32 screws provided.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not using a dimmer.
5. Carefully tuck the driver and all the wires into the junction box.

### III. Installing the Fixture

1. Install the mounting plate to the junction box and secure it using the mounting screws.
2. For wet locations, caulk around the base with waterproof construction sealant.