



PERFORMANCE	CERTIFICATION
Delivered Lumens 397 lm	ADA Compliant
Power Consumption 9W	UL Listed
Luminous Efficacy 44.3 lm/W	UL Listed to Canadian safety standards.
Full detail in photometry summary .	Suitable for Damp Locations
	LED LIFESPAN
	50k hours

SPECIFICATION LOGIC

DIFFUSER STYLE	
Shell	1
Seed	2
Pod	3
COLOR TEMPERATURE	
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
DIMMING / CONTROL / INPUT	
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
0-10V Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

DRAWINGS



Mori Sconce

Sconces

YOUR PRODUCT CODE

MS- - - - -

DESCRIPTION

This simple, glowing sconce is distinguished by its pared-down silhouette. A minimal wire frame is fully cocooned in a resilient, non-woven TPU skin. A matte protective finish adds durability to this elegant, soft material while preserving the shade's distinctive character. The resulting shade emits a lantern-like, ambient light.

Resilient webbed TPU skin over wire frame. Finished with durable matte lacquer.


MS-2 Mori Seed Sconce Dimension

PRODUCT DIMENSIONS


Shell 7 in dia x 4 in D | Seed 7 in dia x 4 in D | Pod 11 in dia x 4 in D

PRODUCT WEIGHT


1 lb / 0.5 kg

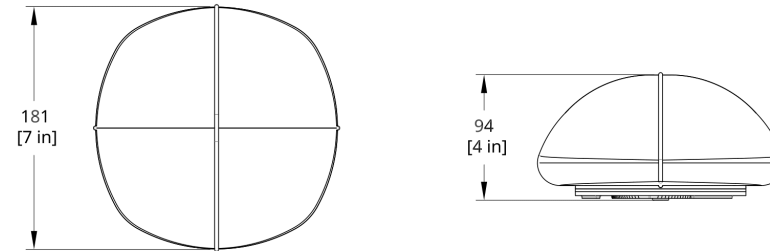

MS-3 Mori Pod Sconce Dimension

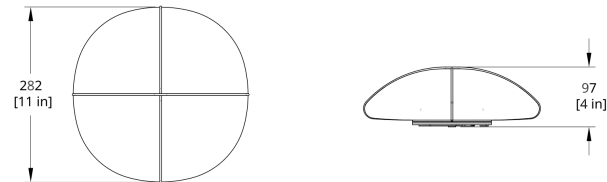

MS-1 Mori Shell Sconce Dimension

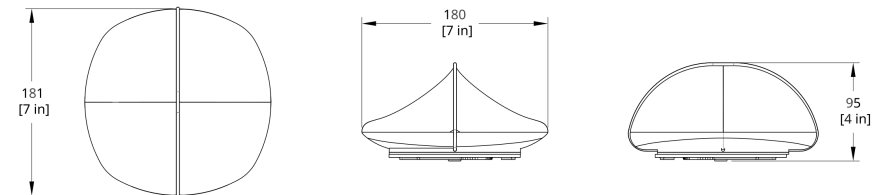



PERFORMANCE

Delivered Lumens 397 lm
Power Consumption 9W
Luminous Efficacy 44.3 lm/W
Full detail in [photometry summary](#).

CERTIFICATION

ADA Compliant
UL Listed
UL Listed to Canadian safety standards.
Suitable for Damp Locations

LED LIFESPAN

50k hours

SPECIFICATION LOGIC

DIFFUSER STYLE

Shell	1
Seed	2
Pod	3

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT

10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
0-10V Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV

DRAWINGS

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV



Mori Sconce

Sconces

YOUR PRODUCT CODE

MS- - - - -

DESCRIPTION

This simple, glowing sconce is distinguished by its pared-down silhouette. A minimal wire frame is fully cocooned in a resilient, non-woven TPU skin. A matte protective finish adds durability to this elegant, soft material while preserving the shade's distinctive character. The resulting shade emits a lantern-like, ambient light.

Resilient webbed TPU skin over wire frame. Finished with durable matte lacquer.


MS-2 Mori Seed Sconce Dimension

PRODUCT DIMENSIONS


Shell 7 in dia x 4 in D | Seed 7 in dia x 4 in D | Pod 11 in dia x 4 in D

PRODUCT WEIGHT


1 lb / 0.5 kg

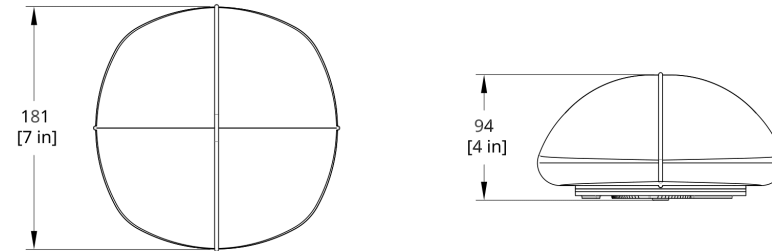

MS-3 Mori Pod Sconce Dimension

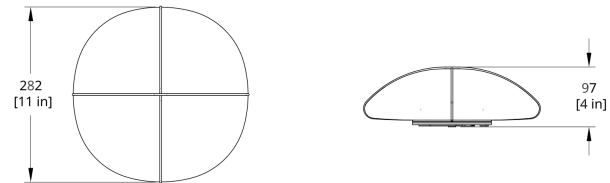

MS-1 Mori Shell Sconce Dimension

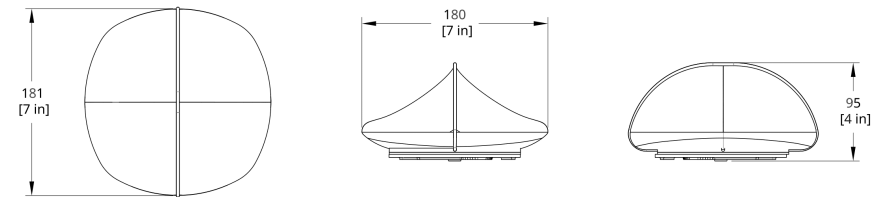



PERFORMANCE

Delivered Lumens 397 lm
Power Consumption 9W
Luminous Efficacy 44.3 lm/W
Full detail in [photometry summary](#).

CERTIFICATION

ADA Compliant
UL Listed
UL Listed to Canadian safety standards.
Suitable for Damp Locations

LED LIFESPAN

50k hours

SPECIFICATION LOGIC

DIFFUSER STYLE

Shell	1
Seed	2
Pod	3

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT

10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
0-10V Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV

DRAWINGS

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV



Mori Sconce

Sconces

YOUR PRODUCT CODE

MS- - - - -

DESCRIPTION

This simple, glowing sconce is distinguished by its pared-down silhouette. A minimal wire frame is fully cocooned in a resilient, non-woven TPU skin. A matte protective finish adds durability to this elegant, soft material while preserving the shade's distinctive character. The resulting shade emits a lantern-like, ambient light.

Resilient webbed TPU skin over wire frame. Finished with durable matte lacquer.


MS-2 Mori Seed Sconce Dimension

PRODUCT DIMENSIONS


Shell 7 in dia x 4 in D | Seed 7 in dia x 4 in D | Pod 11 in dia x 4 in D

PRODUCT WEIGHT

1 lb / 0.5 kg

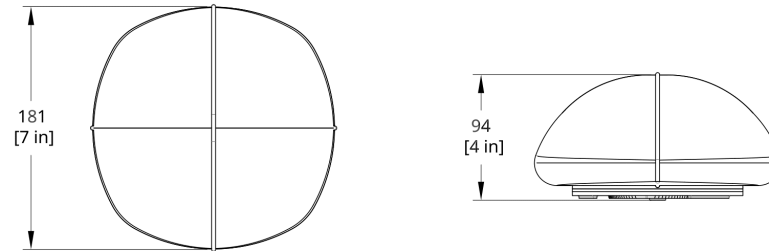

MS-3 Mori Pod Sconce Dimension

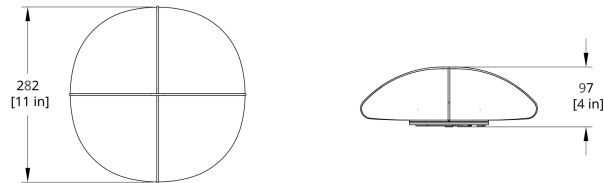

MS-1 Mori Shell Sconce Dimension

