



Ripple Corded

Sconces

YOUR PRODUCT CODE

RP-C- - - - -

DESCRIPTION

Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water. Achieve a junction box free installation with corded plug-in capabilities for top RBW collections. Select from panel mount ready or fasten directly to the wall with the option to include a toggle switch along the cord. Achieve maximum 575 Boices Ln Kingston NY 12401 T +1 212 388 1621 sales@rbw.com

PERFORMANCE

Delivered Lumens 697 lm (Frosted) | 390 lm (White) | 341 lm (Smoked) | 66 lm (Copper) | 414 lm (Jade)
Power Consumption 10W
Luminous Efficacy 69.1 lm/W (Frosted) | 38.7 lm/W (White) | 33.8 lm/W (Smoked) | 6.5 lm/W (Copper) | 41.1 lm/W (Jade)
90 CRI
Full detail in [photometry summary](#)

CERTIFICATION

ADA Compliant
UL Listed
UL Listed to Canadian safety standards.
Suitable for Dry Locations Only
IP20

LED LIFESPAN

50k hours

PATENT FILE NUMBER

US: D1099401, CA: Patent Pending, CN: 202330243342.6, EU: 015019600-0001, 015019600-0002

SPECIFICATION LOGIC

GLASS FINISH

White Interior	S20
Smoked	S21
Frosted	S22
Copper Exterior	S23
Jade	S24

BACKPLATE FINISH

Natural Anodized	AA01
Black Anodized	AA04

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

CORDED PLUG-IN

Corded Plug-in (Back) / 120V Input	CBA_120V
Corded Plug-in (Bottom) / 120V Input	CBO_120V
Corded Plug-in (Bottom) w. Toggle Switch / 120V Input	CTS_120V

DRAWINGS

IP RATING

IP 20	IP20
-------	------

versatility with minimal presence thanks to secure mounting technology.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Luminaire lumens listed are for DC input. AC input are within photometry downloads. Each form of cast glass is unique. As part of the casting process, there may be small air bubbles within the glass.


PRODUCT DIMENSIONS

5 in dia x 4 in D


PRODUCT WEIGHT

3.5 lbs / 2 kg

RP-C Ripple Corded Sconce (Cord Back)

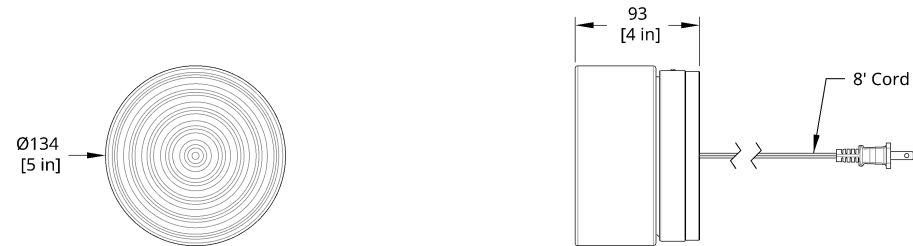

RP-C Ripple Corded Sconce (Cord Bottom w. Toggle Switch)

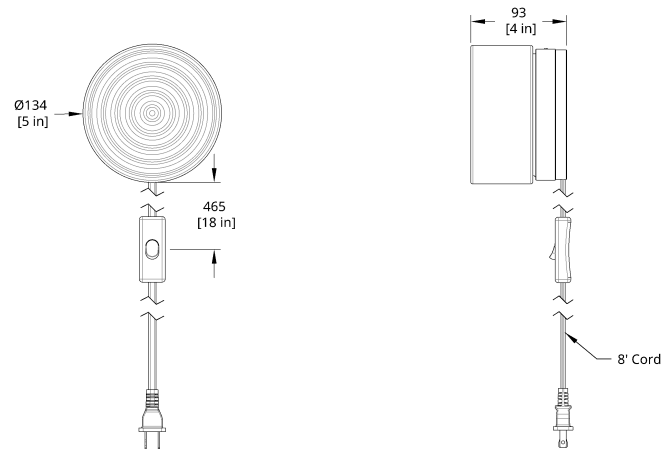



Ripple Corded

Sconces

YOUR PRODUCT CODE

RP-C- - - - -

DESCRIPTION

Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water. Achieve a junction box free installation with corded plug-in capabilities for top RBW collections. Select from panel mount ready or fasten directly to the wall with the option to include a toggle switch along the cord. Achieve maximum 575 Boices Ln Kingston NY 12401 T +1 212 388 1621 sales@rbw.com

PERFORMANCE

Delivered Lumens 697 lm (Frosted) | 390 lm (White) | 341 lm (Smoked) | 66 lm (Copper) | 414 lm (Jade)
Power Consumption 10W
Luminous Efficacy 69.1 lm/W (Frosted) | 38.7 lm/W (White) | 33.8 lm/W (Smoked) | 6.5 lm/W (Copper) | 41.1 lm/W (Jade)
90 CRI
Full detail in [photometry summary](#)

CERTIFICATION

ADA Compliant
UL Listed
UL Listed to Canadian safety standards.
Suitable for Dry Locations Only
IP20

LED LIFESPAN

50k hours

PATENT FILE NUMBER

US: D1099401, CA: Patent Pending, CN: 202330243342.6, EU: 015019600-0001, 015019600-0002

SPECIFICATION LOGIC

GLASS FINISH

White Interior	S20
Smoked	S21
Frosted	S22
Copper Exterior	S23
Jade	S24

BACKPLATE FINISH

Natural Anodized	AA01
Black Anodized	AA04

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

CORDED PLUG-IN

Corded Plug-in (Back) / 120V Input	CBA_120V
Corded Plug-in (Bottom) / 120V Input	CBO_120V
Corded Plug-in (Bottom) w. Toggle Switch / 120V Input	CTS_120V

DRAWINGS

IP RATING

IP 20	IP20
-------	------

versatility with minimal presence thanks to secure mounting technology.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Luminaire lumens listed are for DC input. AC input are within photometry downloads. Each form of cast glass is unique. As part of the casting process, there may be small air bubbles within the glass.


PRODUCT DIMENSIONS

5 in dia x 4 in D


PRODUCT WEIGHT

3.5 lbs / 2 kg

RP-C Ripple Corded Sconce (Cord Back)

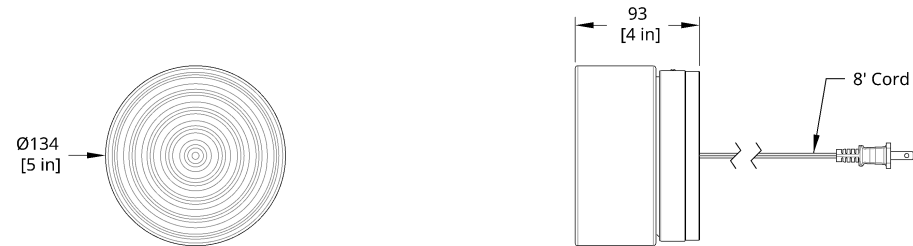

RP-C Ripple Corded Sconce (Cord Bottom w. Toggle Switch)

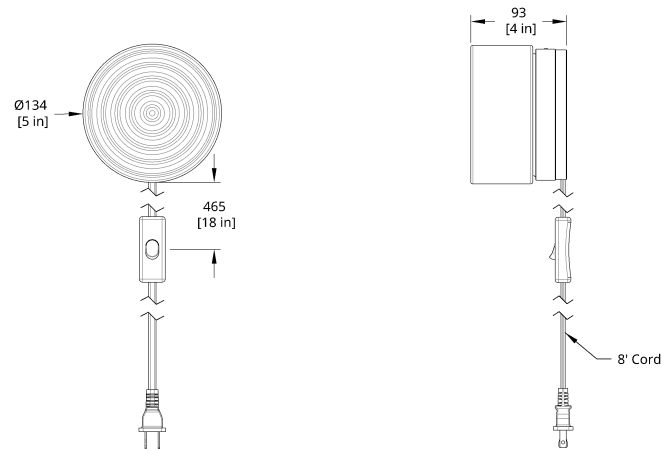



Ripple Corded

Sconces

YOUR PRODUCT CODE

RP-C- - - - -

DESCRIPTION

Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water. Achieve a junction box free installation with corded plug-in capabilities for top RBW collections. Select from panel mount ready or fasten directly to the wall with the option to include a toggle switch along the cord. Achieve maximum 575 Boices Ln Kingston NY 12401 T +1 212 388 1621 sales@rbw.com

PERFORMANCE

Delivered Lumens 697 lm (Frosted) | 390 lm (White) | 341 lm (Smoked) | 66 lm (Copper) | 414 lm (Jade)
Power Consumption 10W
Luminous Efficacy 69.1 lm/W (Frosted) | 38.7 lm/W (White) | 33.8 lm/W (Smoked) | 6.5 lm/W (Copper) | 41.1 lm/W (Jade)
90 CRI
Full detail in [photometry summary](#)

CERTIFICATION

ADA Compliant
UL Listed
UL Listed to Canadian safety standards.
Suitable for Dry Locations Only
IP20

LED LIFESPAN

50k hours

PATENT FILE NUMBER

US: D1099401, CA: Patent Pending, CN: 202330243342.6, EU: 015019600-0001, 015019600-0002

SPECIFICATION LOGIC

GLASS FINISH

White Interior	S20
Smoked	S21
Frosted	S22
Copper Exterior	S23
Jade	S24

BACKPLATE FINISH

Natural Anodized	AA01
Black Anodized	AA04

COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

CORDED PLUG-IN

Corded Plug-in (Back) / 120V Input	CBA_120V
Corded Plug-in (Bottom) / 120V Input	CBO_120V
Corded Plug-in (Bottom) w. Toggle Switch / 120V Input	CTS_120V

DRAWINGS

IP RATING

IP 20	IP20
-------	------

versatility with minimal presence thanks to secure mounting technology.

MATERIALS

Cast solid glass, aluminum

COLLECTION NOTES

Luminaire lumens listed are for DC input. AC input are within photometry downloads. Each form of cast glass is unique. As part of the casting process, there may be small air bubbles within the glass.


PRODUCT DIMENSIONS

5 in dia x 4 in D

PRODUCT WEIGHT

3.5 lbs / 2 kg

RP-C Ripple Corded Sconce (Cord Back)

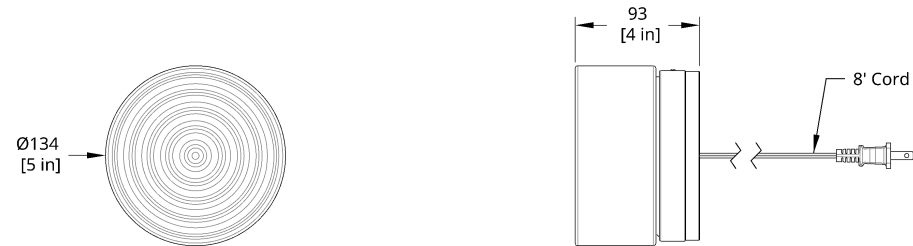

RP-C Ripple Corded Sconce (Cord Bottom w. Toggle Switch)

