


PRODUCT FEATURES

- From the brand formerly known as Tech Lighting
- Efficient, classic adjustable spot head design
- Adjustable spot head design and variable stem length options available
- Fully dimmable integrated LED lamp
- Idea for residential and commercial lighting applications
- Monopoint version - The LED Driver is housed within the junction box. (L. 3.05" | W. 1.5" | H. .98")



LAMPING

Includes 12 volt 9.4 watt, 518.5 delivered lumens, 2700K or 3000K, LED module. Dimmable with most LED compatible or ELV and Triac dimmers. Ace head can pivot 90° (horizontal to straight down). Integrated lens holder accommodates up to (2) lenses and louvers (sold separately). As a general rule when using the Ace head, we do not recommend using greater than 70% of the maximum wattage specified for the low voltage transformer due to inrush current requirements. For assistance in calculations, please contact Technical Support. Ace head only compatible with AC transformers. Compatible with MOCGG, MOCSF, MOCLL, MOCEC, MOCLSI AND MOC LS12 lenses.

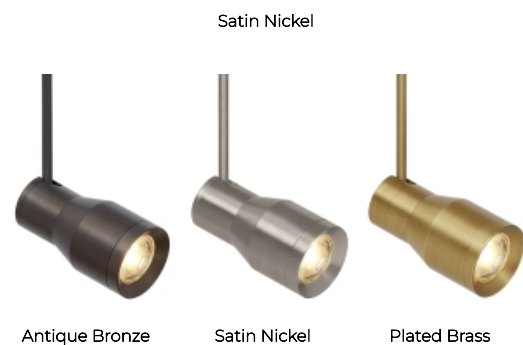

ORDERING INFORMATION

| 700 | SYSTEM | ACE | CRI | COLOR TEMP | BEAM SPREAD | LENGTH (A) | FINISH |
|-----|--------------|-----|----------|------------|-------------|------------|------------------|
| | FJ FREEJACK | | 9 90 CRI | 27 2700K | 40 40° | 55" | Z ANTIQUE BRONZE |
| | MP MONOPOINT | | | 30 3000K | | | BR PLATED BRASS |
| | MO MONORAIL | | | | | | S SATIN NICKEL |

Note. Note. MP includes 4" Round Flush Canopy. For custom stem lengths, please contact the Quotes Department.

700 _____ ACE _____


JOB NAME _____

NOTES _____



SPECIFICATIONS

| | |
|-------------------------------|------------|
| PRIMARY MATERIAL | Metal |
| SHADE MATERIAL | Metal |
| NET WEIGHT | 1.5 lbs |
| HEIGHT | 1.9in |
| WIDTH | 1.9in |
| LENGTH | 3.6in |
| BEAM SPREAD | |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 5in |
| MAX HANGING HEIGHT | 5in |
| TOTAL CORD LENGTH | |
| SLOPED CEILING ADAPTABLE? | No |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |



LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|-----------------------------------|---------|---------|
| DELIVERED LUMENS | | 518.5 | | |
| WATTS | | 9.4 | | |
| MAX WATTAGE PER BULB | | 9.4W | | |
| | | 12V ELV, TRIAC 120V ELV, TRIAC | | |
| CCT | | 2700K 3000K | | |
| CRI | | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | >50000 | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | Integrated LED | | |
| LAMP SHAPE | | Integrated LED | | |
| LAMP INCLUDED? | | True | | |
| WARRANTY** | | 5 Years | | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|---|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | N/A | | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

